




Configuration Results

Product: 440G-T27127
Description: Guard Locking Switch - 440G TLS-GD2: Solenoid Voltage: 24V AC/DC, Contacts(Safety and Aux): 2 Normally Closed, 1 Normally Open, Actuator: No Actuator, Conduit Entry: M20 Conduit

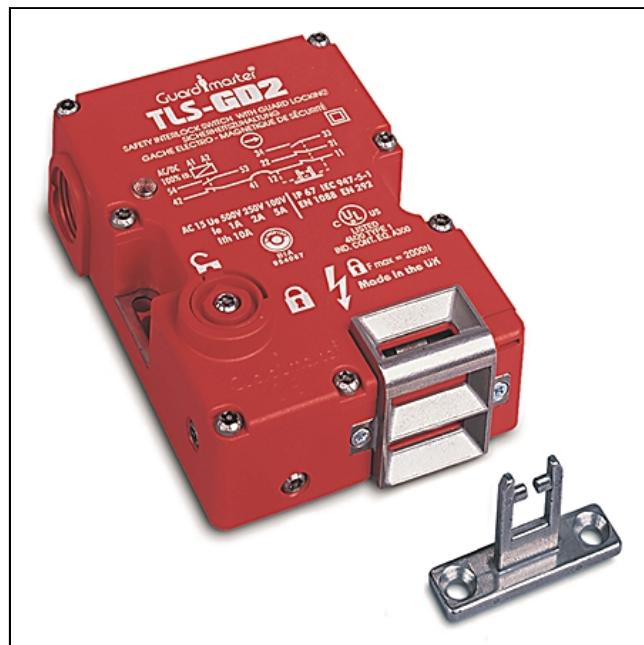

Representative Photo Only (actual product may vary based on configuration selections)

Selected Components

Selected Components

Catalog Number	Qty	Product Description	Supplementary Documents
440G-T27127	1	Guard Locking Switch - 440G TLS-GD2: Solenoid Voltage: 24V AC/DC, Contacts(Safety and Aux): 2 Normally Closed, 1 Normally Open, Actuator: No Actuator, Conduit Entry: M20 Conduit	<ul style="list-style-type: none"> ● Product Details and Certifications ● Photo ● 2-Dimensional Drawing (DWG/DXF) ● 3-Dimensional STEP model (STP)

Contact your [Rockwell Automation Distributor or sales representative](#) for local pricing.

Modify

Cancel

E Mail